




Metric Ejector Pins

Nitrided

Tolerances mm	
Pin Diameter (d1)	g6
Head Diameter (d2)	-0.2
Head Thickness (T)	-0.05
Length (L)	+0.2
Radius (r)	+0.2

SEE METRIC TOLERANCE
CHART ON PAGE G1

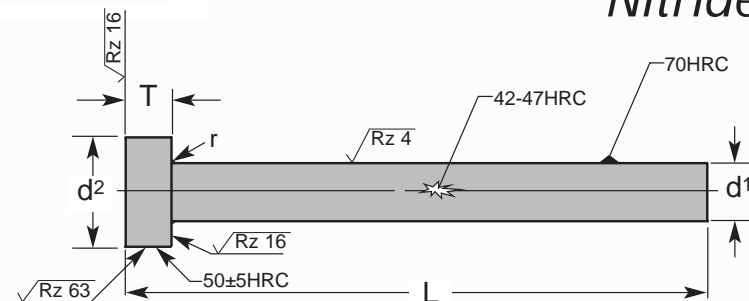

TYPE	A
DIN	1530
ISO	6751
MATERIAL	H-13
NITRIDED	

CATALOG NUMBER	d1 PIN DIA	d2 HEAD DIA	T HEAD THICK	r RADIUS	L = LENGTH											
					125	160	200	250	315	400	500	630	800	1000		
MP015-	1.5	3.0	1.5	0.2	•	•	•									
MP02-	2.0	4.0	2.0	0.2	•	•	•	•								
MP022-	2.2	4.0	2.0	0.2	•		•									
MP025-	2.5	5.0	2.0	0.3	•	•	•	•	•							
MP027-	2.7	5.0	2.0	0.3	•	•	•									
MP03-	3.0	6.0	3.0	0.3	•	•	•	•		•						
MP032-	3.2	6.0	3.0	0.3	•	•	•	•	•							
MP035-	3.5	7.0	3.0	0.3	•	•	•	•	•							
MP037-	3.7	7.0	3.0	0.3	•	•	•	•	•							
MP04-	4.0	8.0	3.0	0.3	•	•	•	•	•	•						
MP042-	4.2	8.0	3.0	0.3	•	•	•	•	•							
MP045-	4.5	8.0	3.0	0.3	•	•	•	•		•						
MP05-	5.0	10.0	3.0	0.3	•	•	•	•	•	•	•		•	•		
MP052-	5.2	10.0	3.0	0.3	•	•	•	•	•	•						
MP055-	5.5	10.0	3.0	0.3	•	•	•	•	•	•						
MP06-	6.0	12.0	5.0	0.5	•	•	•	•	•	•	•	•	•		•	
MP062-	6.2	12.0	5.0	0.5	•	•	•	•	•	•	•	•	•			
MP065-	6.5	12.0	5.0	0.5	•	•	•	•	•	•	•	•	•			
MP07-	7.0	12.0	5.0	0.5	•	•	•	•	•	•	•	•	•			
MP08-	8.0	14.0	5.0	0.5	•	•	•	•	•	•	•	•	•	•		•
MP082-	8.2	14.0	5.0	0.5	•	•	•	•	•	•	•	•	•	•		
MP085-	8.5	14.0	5.0	0.5	•	•	•	•	•	•	•	•	•			
MP09-	9.0	14.0	5.0	0.5	•	•	•	•	•	•	•	•	•	•		
MP10-	10.0	16.0	5.0	0.5	•	•	•	•	•	•	•	•	•	•	•	
MP102-	10.2	16.0	5.0	0.5	•	•	•	•	•	•	•	•	•	•		
MP105-	10.5	16.0	5.0	0.5	•	•	•	•	•	•	•	•	•	•		
MP11-	11.0	16.0	5.0	0.5	•	•	•	•	•	•	•	•	•	•		
MP12-	12.0	18.0	7.0	0.8	•	•	•	•	•	•	•	•	•	•	•	•
MP122-	12.2	18.0	7.0	0.8	•	•	•	•	•	•	•	•	•	•		
MP125-	12.5	18.0	7.0	0.8	•	•	•	•	•	•	•	•	•	•		
MP14-	14.0	18.0	7.0	0.8	•	•	•	•	•	•	•	•	•	•	•	•
MP16-	16.0	22.0	7.0	0.8	•	•	•	•	•	•	•	•	•	•	•	•
MP18-	18.0	24.0	7.0	0.8	•	•	•	•	•	•	•	•	•	•	•	•
MP20-	20.0	26.0	8.0	1.0	•	•	•	•	•	•	•	•	•	•	•	•
MP25-	25.0	32.0	10.0	1.0		•	•	•	•	•	•	•	•	•	•	•
MP32-	32.0	40.0	10.0	1.0		•	•	•	•	•	•	•	•	•	•	•

NOTE: Add length to end of catalog number (MP015-100)