


Self-Lubricating Wear Ways

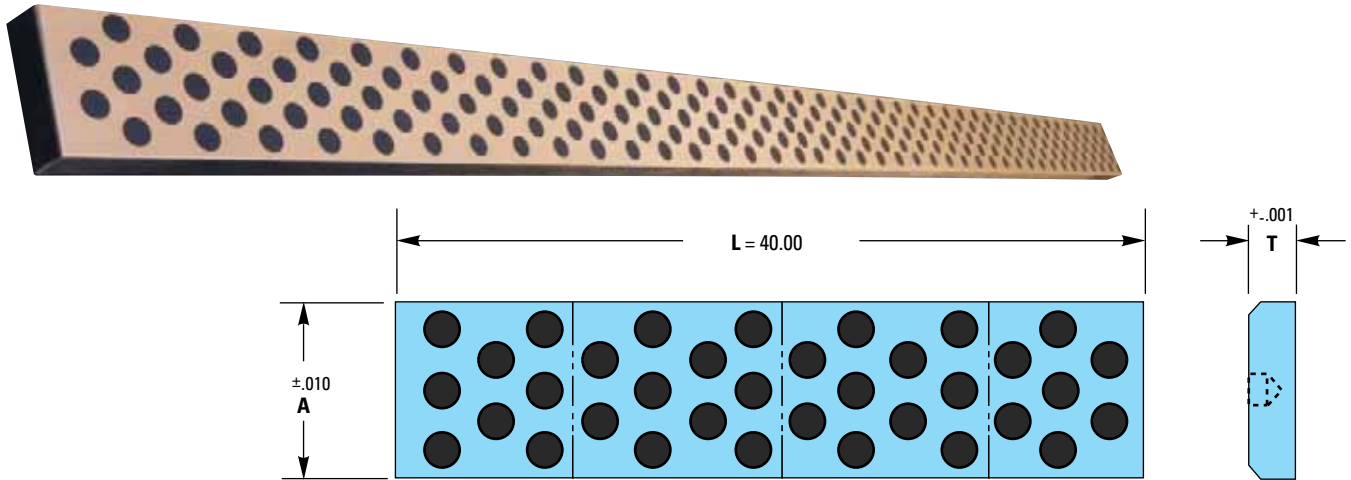

NOTE: All D-M-E Self-Lubricating Wear Ways are supplied in 40" lengths.

Self-Lubricating Wear Ways – SLW


- Well-suited for custom applications
- Standard plug pattern facilitates cutting to a variety of lengths
- No pre-drilled holes – allows flexibility in mounting patterns

D-M-E Self-Lubricating Wear Ways are supplied in 40-inch lengths. The plug pattern is consistent throughout the surface of the Wear Way, so that the Wear Way may be cut to a variety of lengths. Mounting holes are not supplied so that they may be drilled to suit custom applications.


Typical mounting procedure is to machine out the plug location to use for mounting screws. (See "Suggestions for Fastening" below.)

Suggestions for Fastening

Typical mounting procedure is to use plug location for screw location.

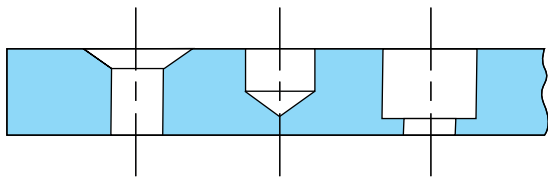

NOTE: For 3/8" thicknesses, the suggested screw is a 1/4 flathead screw (or 1/4 socket head screw max).

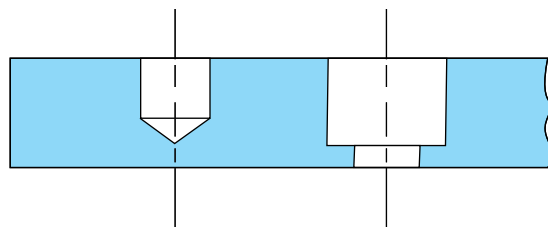

NOTE: For 1/2", 5/8", 3/4" thicknesses, the suggested screw is a 3/8 socket head screw max.

Material: Aluminum Bronze with Graphite Plugs
Hardness: 179 Bhn

ITEM NUMBER	T THICKNESS	A WIDTH
SLW0515	.375	1.50
SLW0520	.375	2.00
SLW0525	.375	2.50
SLW0530	.375	3.00
SLW0615	.500	1.50
SLW0620	.500	2.00
SLW0625	.500	2.50
SLW0630	.500	3.00
SLW0640	.500	4.00
SLW0720	.625	2.00
SLW0730	.625	3.00
SLW0740	.625	4.00
SLW0820	.750	2.00
SLW0830	.750	3.00
SLW0840	.750	4.00
SLW0850	.750	5.00

All items in stock.

WHEN ORDERING, PLEASE SPECIFY:

1. Item Numbers from charts
2. Quantity
3. Method of shipment