


L-Gibs for Gib Assemblies

NOTES:

1. Tolerances not noted are $\pm .010$, Hole locations are $\pm .005$.
2. Graphic plug pattern varies by product size.

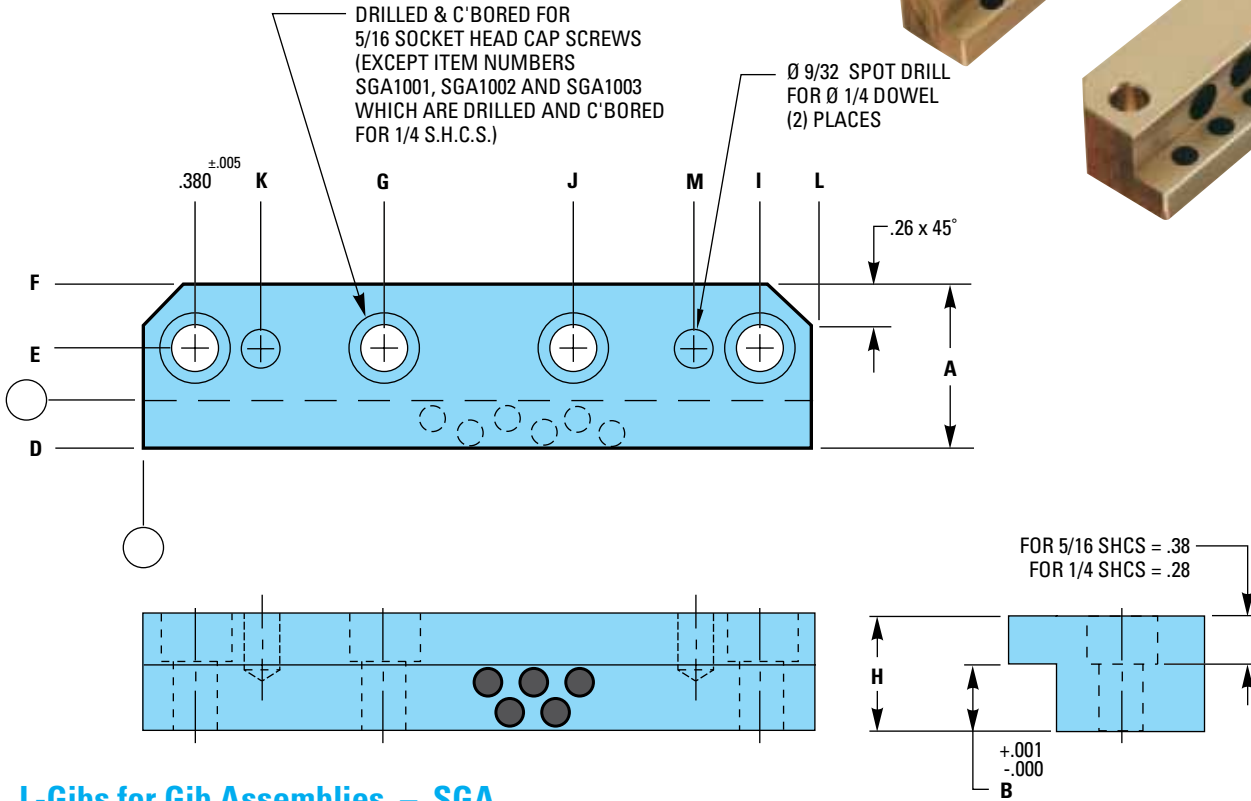

L-Gibs for Gib Assemblies – SGA

Material: Aluminum Bronze with Graphite Plugs **Hardness:** 179 Bhn

ITEM NUMBER	H	A	L	B	D	E	F	G	I	J	K	M	MOUNTING HOLE QTY
SGA1001	.75	.750	2.00	.312	.188	.28	.56	—	—	1.26	.79	1.74	2
SGA1002	.75	.750	3.00	.312	.188	.28	.56	—	2.620	—	.88	2.12	2
SGA1003	.75	.750	4.00	.312	.188	.28	.56	2.00	3.620	—	.88	3.12	3
SGA2001	.75	1.000	3.00	.375	.250	.38	.75	—	2.620	—	.88	2.12	2
SGA2002	.75	1.000	4.00	.375	.250	.38	.75	2.00	3.620	—	.88	3.12	3
SGA2003	.75	1.000	5.00	.375	.250	.38	.75	2.50	4.620	—	.88	4.12	3
SGA3001	.88	1.250	3.00	.500	.375	.38	.88	—	2.620	—	.88	2.12	2
SGA3002	.88	1.250	4.00	.500	.375	.38	.88	2.00	3.620	—	.88	3.12	3
SGA3003	.88	1.250	5.00	.500	.375	.38	.88	2.50	4.620	—	.88	4.12	3
SGA3004	.88	1.250	6.00	.500	.375	.38	.88	2.00	5.620	4.000	.88	5.12	4
SGA4001	1.25	1.500	4.00	.750	.500	.44	1.00	2.00	3.620	—	.88	3.12	3
SGA4002	1.25	1.500	5.00	.750	.500	.44	1.00	2.50	4.620	—	.88	4.12	3
SGA4003	1.25	1.500	6.00	.750	.500	.44	1.00	2.00	5.620	4.000	.88	5.12	4

WHEN ORDERING, PLEASE SPECIFY:

1. Item Numbers from charts
2. Quantity
3. Method of shipment

All items in stock.